


DATA SHEET



TESTED FOR	RESULT	CONFIRM TO DIN
Lightfastness:	4+	54004
Possible color change:	gets lighter	
Abrasion values:	Level:	
Dry	5	53339
Wet	5	
Perspiration	5	
Permanent folding behavior: 20.000 bucklings	passed	53340
Tensile strength: 20 N/mm	passed	53329
Burning behavior: y EN1021 part I u. II	passed	

BELUGAWEISS 360

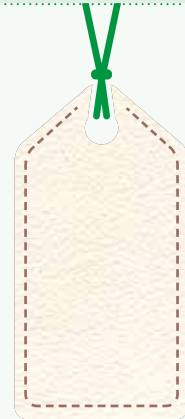

Color: Belugaweiss 360
Collection: Nappa
Thickness: 1,4 - 1,6 mm



Optional and only
subject to availability.
Please ask explicitly.

Detaillied information about light fastness, abrasion values, skin tollernace and burning behaviour can be found at:
www.vegetable-tanned-leather.com/data-and-facts.html

DATA SHEET



Results of the examination for heavy metals

Heavy metals	H 5154 FL Ecopell 360 Belugaweiss KW 23 (mg/kg)	BG (mg/kg)
Antimony	<0,5	0,5
Aluminium	180	10
Arsenic	<0,5	0,5
Lead	<0,5	0,5
Cadmium	<0,2	0,2
Chrome	7	1
Cobalt	<1	1
Mercury	<0,1	0,1
Nickel	<1	1
Titanium	2300	10
Zirconium	165	5

Results of the examination for PAK

Parameter	H 5154 FL Ecopell 360 Belugaweiss KW 23 (mg/kg)	NG (mg/kg)
Naphthalene	0,05	0,01
Acenaphthylene	0,01	0,01
Acenaphthenes	0,01	0,01
Fluorene	nn	0,01
Phenanthrene	0,05	0,02
Anthracene	nn	0,02
Fluoranthene	0,02	0,02
Pyrene	0,02	0,02
Chrysene	nn	0,02
Benzo (a) Anthracene	nn	0,02
Benzo (b) Fluoranthene	nn	0,02
Benzo (k) Fluoranthene	nn	0,02
Benzo (a) Pyrene	nn	0,02
Indeno (1,2,3-cd) Pyrene	nn	0,02
Dibenzo (a, h) Anthracene	nn	0,02
Benzo (g, h, i) Perylene	nn	0,02
Sum PAK	0,16	

BG = limit of determination | NG = detection limit | mg/KG = milligram per kilogram | nn = not detected